

## StanChem SC 5237

### Description:

**Stan**Chem SC 5237 is a cellulose ether-stabilized, vinyl/VeoVa® copolymer dispersion. While designed specifically for high performance intumescent paints and coatings, SC 5237 is also suitable for low cost, high PVC interior or exterior paints.

### **Typical Physical Properties:**

Type: Vinyl/VeoVa® Copolymer

**Solids by weight:** 49.0 - 51.0 %

**Viscosity\* @ 25°C:** 2,000 – 5,000 cps

**pH @ 25°C:** 4.0 – 5.0

**Density:**  $9.00 \pm 0.10 \, \text{lbs/gal}$ 

**Tg (DSC)**: 26°C

Freeze / Thaw PASS (5 Cycles)
Resistance (10°F)

**Storage:** SC 5237 is stable for at least 6 months from manufacturing date when stored between 5°C and 40°C in appropriate containers.

### **WARRANTY:**

Seller warrants that its product will meet the specifications which it sets for them. Seller's responsibility under this warranty will be limited solely to replacing the products which prove defective, provided that the Buyer gives Seller prompt notice in writing of said defect. Products may be returned to Seller only after written authorization has been obtained from Seller. The foregoing warranty is in lieu of all other warranties, whether oral, written, express, implied or statutory. IMPLIED WARRANTIES OF MERCHANTINILITY AND FITNESS FOR A PARTICULAR PURPOSE WILL NOT APPLY. Technical or other advise is furnished by us solely as an accommodation ands shall not increase the scope of our responsibilities or liability. Seller's warranty obligations and Buyer's remedies hereunder are solely and exclusively as stated herein: In no event will Seller be liable either for the labor and other associated costs incurred in replacing the product, including, but not limited to, its removal and application, or for other incidental or consequential damages.

<sup>\*</sup>Brookfield RVT, #4 Spindle @ 20 RPM



# StanChem SC 5237 White Intumescent Coating

<b>Pounds</b>	<u>Gallons</u>	Raw Material	Supplier	Instructions
231.0	27.73	Water		Charge to vessel
3.5	0.71	Natrosol 250 HBR	Ashland	Add under low agitation and mix for 5-10
5.8	0.79	Byk 038	Byk Chemie	minutes
115.5	3.38	Tronox CR 828	Tronox	Add separately and in order under
115.5	10.10	Charmor PM 40	Perstorp	increasing agitation
115.5	8.82	OCI Melafine	OCI Melamine	
231.0	14.56	Exolit AP 422	Clariant	Increase speed and disperse to 3+ Hegman
268.0	29.78	Stanchem SC 5237	Stanchem	Reduce speed; add next two items and
11.6	1.47	Texanol	Eastman	mix for 10 minutes
<u>57.8</u>	<u>2.66</u>	Microglass 3016	Fibertec	Increase speed and slowly add glass fibers
1155.2	100.00	Total		Maintain batch temperature of <45°C

### **Formulation Parameters**

Weight Solids 68.40%
Volume Solids 57.45%
Density 11.55 lbs/gal
Pigment Volume Concentrate 70.18%
VOC, g/l

### **Typical Paint Properties**

Viscosity (#7 spindle @ 50 rpm) Gloss (20°/60°, at 1.5-2.0 mils DFT) 12,500 cps

# **Stan**Chem


# polymers

### **WARRANTY:**


VOC, lbs/gal

Seller warrants that its product will meet the specifications which it sets for them. Seller's responsibility under this warranty will be limited solely to replacing the products which prove defective, provided that the Buyer gives Seller prompt notice in writing of said defect. Products may be returned to Seller only after written authorization has been obtained from Seller. The foregoing warranty is in lieu of all other warranties, whether oral, written, express, implied or statutory. IMPLIED WARRANTIES OF MERCHANTINILITY AND FITNESS FOR A PARTICULAR PURPOSE WILL NOT APPLY. Technical or other advise is furnished by us solely as an accommodation ands shall not increase the scope of our responsibilities or liability. Seller's warranty obligations and Buyer's remedies hereunder are solely and exclusively as stated herein: In no event will Seller be liable either for the labor and other associated costs incurred in replacing the product, including, but not limited to, its removal and application, or for other incidental or consequential damages.

## StanChem SC 5237 Expected Performance

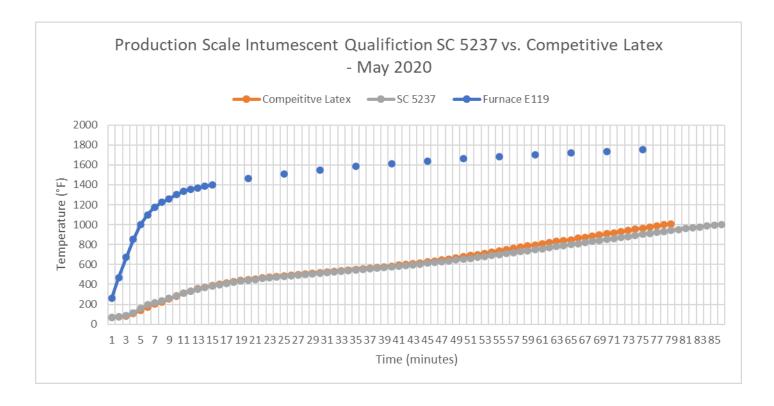

### ASTM E119 tests of intumescent coatings made with

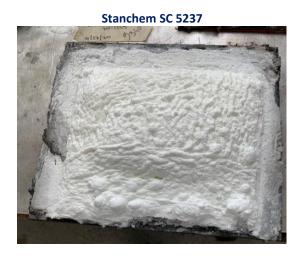



#### **WARRANTY:**

Seller warrants that its product will meet the specifications which it sets for them. Seller's responsibility under this warranty will be limited solely to replacing the products which prove defective, provided that the Buyer gives Seller prompt notice in writing of said defect. Products may be returned to Seller only after written authorization has been obtained from Seller. The foregoing warranty is in lieu of all other warranties, whether oral, written, express, implied or statutory. IMPLIED WARRANTIES OF MERCHANTINILITY AND FITNESS FOR A PARTICULAR PURPOSE WILL NOT APPLY. Technical or other advise is furnished by us solely as an accommodation ands shall not increase the scope of our responsibilities or liability. Seller's warranty obligations and Buyer's remedies hereunder are solely and exclusively as stated herein: In no event will Seller be liable either for the labor and other associated costs incurred in replacing the product, including, but not limited to, its removal and application, or for other incidental or consequential damages.